

Smoothing Every Step of the Installation

See Reverse for
More Information ▶

NEW
Breakthrough
Technology

TEC® WoodPerfect™ Advanced Performance Wood Flooring Adhesive



Meticulously positioning wood planks can be rough, but new, time-saving TEC® WoodPerfect™ adhesive offers an innovative solution. Unlike other premium offerings, WoodPerfect™ combines superior wet suction and exceptional trowelability without the drawbacks of challenging cleanup. In addition, WoodPerfect™ offers sound reduction, moisture control and cleans off the flooring surface easily without solvents — smoothing the way to a successful installation.

Visit tecspecialty.com to learn more.

**Trust WoodPerfect™ for the perfect balance of performance
and ease of use.**

 **TEC™**
IMAGINE. ACHIEVE.®


TEC® WoodPerfect™ Advanced Performance Wood Flooring Adhesive is a ground-breaking development in wood flooring adhesives that maximizes performance with installer-friendly benefits. Unlike other premium offerings, WoodPerfect™ delivers one-step moisture control, strong initial grab, sound deadening and crack bridging capabilities in an installer-friendly formula that's easy to apply and easy to clean.



Fast initial grab with strong bond strength



Smooth, low odor, installer-friendly formula

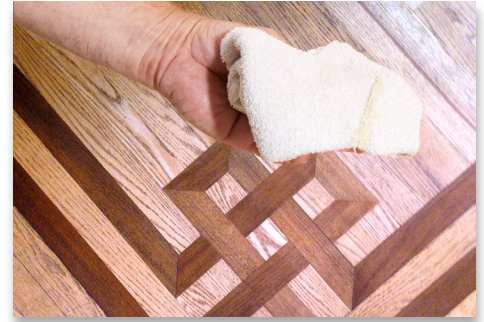

Cleans easily from flooring with no solvents

Features | Benefits

| | |
|---|--|
| Exceptional "green grab", yet easy to reposition | Holds planks despite imperfections, for easier professional finish |
| Installer-friendly formula | Superior troweling performance; less fatigue from handling and faster installs |
| No width or length limitations | Ideal for installing large plank and repurposed plank floors |
| Reduces MVER from 15 lbs. down to 3 lbs. in damp concrete with RH up to 95% | One-step installation with Moisture/Sound Inhibitor trowel; eliminates need for separate moisture vapor barrier to save time |
| Delta IIC 22 dB Sound reduction contribution | Reduces sound transmission through concrete subfloors in excess of building code requirements |
| Cleans easily off flooring surface | No solvents, less time and labor needed |
| Notched trowel ridges hold firm | Minimal hollow spots and gaps between flooring and substrate |
| Low VOC / low odor / isocyanate free | Installer-friendly formula |



Packaging 4-gallon plastic pail (15.13 L) Product #7183181311

Coverage

Determine recommended trowel size based on flooring type. Coverage will vary with the absorption of substrate and trowel size. Figures below are presented only as guidelines.

| Flooring Type | Recommended Trowel Size | Approximate Coverage |
|---|--|---|
| Solid wood, engineered wood, solid bamboo | 3/16" x 1/4" x 1/2" (4.7 x 6 x 12 mm) FV trowel | 75-85 sq. ft./gal. (1.83-2.08 m ² /L) |
| Parquet | 1/8" x 1/8" x 1/8" (3 x 3 x 3 mm) square-notch trowel | 60-70 sq. ft./gal. (1.47-1.71 m ² /L) |
| All wood types with moisture inhibitor or sound reduction layer | 3/16" x 1/4" x 1/2" (4.7 x 6 x 12 mm) Moisture/Sound Inhibitor trowel* | 30-35 sq. ft./gal. (0.73-0.85 m ² /L) |
| Cork with no backer, cork underlayment | 1/16" x 1/16" x 1/16" (1.6 x 1.6 x 1.6 mm) square-notch trowel | 120-140 sq. ft./gal. (2.94-3.43 m ² /L) |

*One trowel per pail required due to trowel wear.

Suitable Substrates

When properly prepared, suitable substrates include:

- Concrete slabs
- OSB (underlayment grade)
- Plywood (underlayment grade)
- Particle or chipboard (underlayment grade)
- Damp concrete with a moisture vapor emission rate of 3 to 15 lbs./1,000 sq. ft./24 hrs. (1.36-6.80 kg/93 m²/24 hrs.) or up to 95% RH*
- Cured leveling compounds
- Radiant heated subfloors
- Ceramic tiles
- Stone, terrazzo
- Cork underlayment
- Adhesive residue (except tacky or pressure-sensitive adhesive)

* Requires application with the Moisture/Sound Inhibitor trowel. For concrete with greater moisture levels, treat the concrete with TEC® LiquiDam™ Penetrating Moisture Vapor Barrier or LiquiDam EZ™ Moisture Vapor Barrier.

For complete details visit tecspecialty.com