

Superior In Performance. Unmatched In Design.

See Reverse for
More Information ▶



TEC® AccuColor EFX® Epoxy Special Effects Grout

TEC® AccuColor EFX® Epoxy Special Effects Grout redefines traditional epoxies by improving stain resistance, UV color stability and ease of use. Combined with over 700 grout colors plus special effects options, AccuColor EFX® gives you the flexibility to meet the performance and design requirements your projects demand.

Select AccuColor EFX® Epoxy Special Effects Grout for jobs that require superior stain and chemical resistance or unique grout color options.




A dual-purpose mortar/grout, three-part epoxy system for interior (both interior/exterior when used as grout) floors, walls and countertops is designed for residential to extra heavy commercial use. Used as a grout, this system is recommended wherever complete stain or chemical resistance is required and/or desired. High temperature (HT) formula is approved for surfaces subject to extreme heat or steam cleaning up to 350°F (177°C). Used as a mortar, this system is ideal for installing green marble and other moisture-sensitive stones and agglomerates over a wide variety of substrates, including cold rolled steel. For details about TEC® product or system warranties, contact your sales associate or visit tecspecialty.com.



Excellent stain and chemical resistance



Superior UV stability

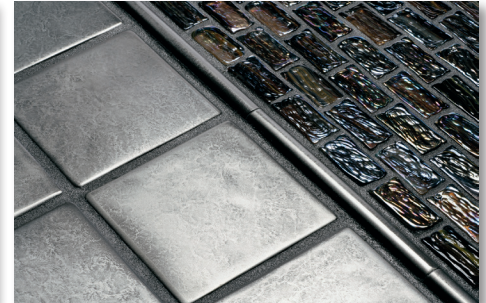

Special effects colors* (special order)

Additional Features and Benefits

- Extremely durable and impact resistant
- Easy application
- For grouting installations in Foodservice Operations such as commercial kitchens where enzymatic cleaners are used
- Ideal for grouting walls up to 1/4" (6 mm) grout joint, floors, and countertops
- Meets or exceeds ANSI A118.3 Standards
- Contributes to LEED® project points with Part A containing 12% pre-consumer recycled content
- Zero VOC

Technical Data

Physical Properties

Description	
Physical State	Paste, once mixed
Pot Life [at 70°F (21°C)]	90 minutes
Initial Set	10 to 14 hours
Final Cure	28 days
Foot Traffic Rating (ASTM C627)	Residential to Extra Heavy Commercial (depending on substrate)
Storage	Store in cool, dry location. Do not store in direct sunlight. Do not store open containers.
Shelf Life	Maximum 18 months from date of manufacture in properly stored, unopened package.

Packaging

3 Gallon (11.35 L) Kit:

Part A: Two 1/2 Gallon (64 fl. oz.) (1.89 L), Resin/Pigment sold separately

Parts B & C: Two 22.6 fl. oz. (.67 L) Part B and two 11.1 lbs (5.03 kg)

Parts B & C packaged in a 5 gallon plastic pail (18.92 L)

Coverage

Figures shown in the chart are presented only as guidelines.

Tile Size	Joint Width in inches (mm)									
	1/16" (1.6)	1/8" (3)	1/4" (6)	3/8" (9)	1/2" (12)	5/8" (16)	3/4" (19)	7/8" (22)	1" (25)	1 1/4" (32)
	Approximate coverage in square feet (m ²)									
	per 3 gallon kit (11.35 L)					per 1.5 gallon kit (5.68 L)				
1" x 1" x 1/4" (25 x 25 x 6 mm)	114 (10.6)	57 (5.3)	28 (2.6)	19 (1.8)	14 (1.3)	57 (5.3)	29 (2.7)	14 (1.3)	10 (0.9)	7 (0.7)
2" x 2" x 1/4" (50 x 50 x 6 mm)	229 (21.3)	114 (10.6)	57 (5.3)	38 (3.5)	28 (2.6)	115 (10.7)	57 (5.3)	29 (2.7)	19 (1.8)	14 (1.3)
4 1/4" x 4 1/4" x 5/16" (108 x 108 x 8 mm)	339 (36.1)	194 (18.0)	97 (9.0)	64 (5.9)	48 (4.5)	195 (18.1)	97 (9.0)	49 (4.5)	32 (3.0)	24 (2.3)
4" x 8" x 1/2" (100 x 200 x 12 mm)	305 (28.3)	152 (14.1)	76 (7.1)	50 (4.6)	38 (3.5)	153 (14.2)	76 (7.1)	38 (3.6)	25 (2.3)	19 (1.8)
6" x 6" x 5/16" (150 x 150 x 8 mm)	549 (51.0)	274 (25.5)	137 (12.7)	91 (8.5)	68 (6.3)	275 (25.5)	137 (12.8)	69 (6.4)	46 (4.3)	34 (3.2)
6" x 6" x 1/2" (150 x 150 x 12 mm)	343 (31.9)	171 (15.9)	85 (7.9)	57 (5.3)	42 (3.9)	172 (16.0)	86 (8.0)	43 (4.0)	29 (2.7)	21 (2.0)
8" x 8" x 5/16" (200 x 200 x 8 mm)	733 (68.1)	366 (34.0)	183 (17.0)	122 (11.3)	91 (8.5)	367 (34.1)	183 (17.0)	92 (8.5)	61 (5.7)	46 (4.3)
8" x 8" x 1/2" (200 x 200 x 12 mm)	458 (42.5)	229 (21.3)	114 (10.6)	76 (7.1)	57 (5.3)	229 (21.3)	115 (10.7)	57 (5.3)	38 (3.6)	29 (2.7)
12" x 12" x 5/16" (300 x 300 x 8 mm)	1099 (102.1)	549 (51.0)	274 (25.5)	183 (17.0)	137 (12.7)	550 (51.1)	275 (25.5)	137 (12.8)	92 (8.5)	69 (6.4)
16" x 16" x 5/16" (400 x 400 x 8 mm)	1466 (136.2)	733 (68.1)	366 (34.0)	244 (22.7)	183 (17.0)	733 (68.1)	367 (34.1)	183 (17.0)	122 (11.4)	92 (8.5)

* Not for wall grout applications.

Visit tecspecialty.com to learn more

*Contact TEC® for more details and order information.

©2016 H.B. Fuller Construction Products Inc.

TEC® the TEC® logo and AccuColor EFX® are trademarks of H.B. Fuller Construction Products Inc.

LEED® is a registered trademark of U.S. Green Building Council