


1 Unique System

Unmatched Tile Installation Performance

Limited
Lifetime
System
Warranty*

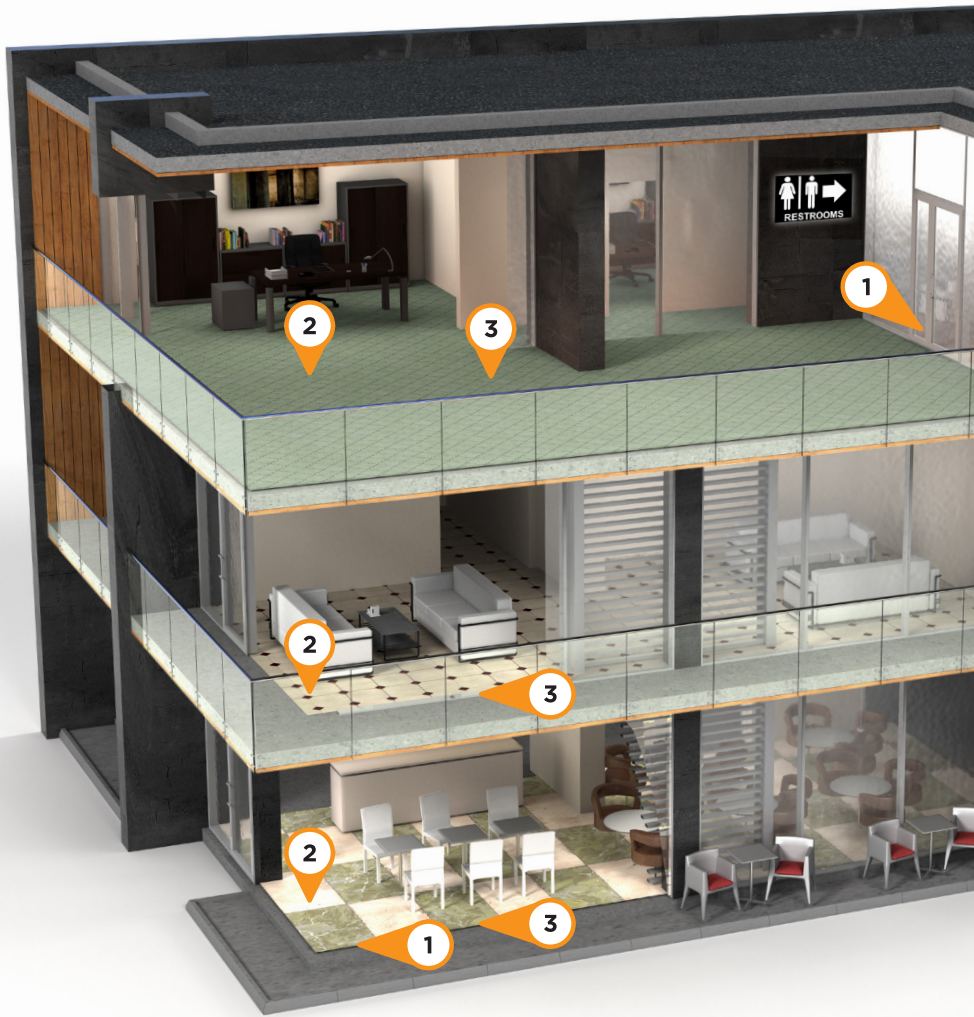

1 System Gives You:

- 1 **Waterproofing & crack isolation**
- 2 **Grout that is crack, shrink and stain resistant**
 - o Zero efflorescence
 - o Sets in 4 hours for faster in-service time
- 3 **A versatile mortar that:**
 - o Is ideal for any size tile – including gauged porcelain panels
 - o Has extended open time – pot life
 - o Can be spread over large surface areas without skinning
 - o Provides non-sag/non-slump characteristics for wall and floor applications
 - o Is approved for use over and under all uncoupling membranes
 - o Allows grouting in 6 hours

TEC® products are designed to make your job easier. Now, you have a **system of products** that will meet most of your tile installation needs. From large commercial jobs to intricate tile designs in a residential kitchen and everything in between, **HydraFlex™**, **Ultimate 6 Plus Mortar** and **Power Grout®** will ensure your success.



Questions? Visit TECQuestions.com

TECSpecialty.com

 @InstallwithTEC  TECInstallationSystems  TEC Installation Systems

*See website for complete warranty details.





HydraFlex™

Ready-to-use, flexible, mold and mildew resistant waterproofing crack isolation membrane for interior and exterior applications. Forms a smooth, monolithic, watertight surface over walls, floors and ceilings. It is mold and mildew resistant.

- Fast drying—ready for tile installation in 1-3 hours
- Use for Positive Hydrostatic Pressure Applications
- Easy roller, trowel or spray application
- Apply over new (green) concrete as little as 3 days old
- Isolates cracks up to 1/8" or up to 1/4" based on application
- Approved over control joints
- Exceeds ANSI A118.10 Specifications for Waterproof Membranes
- Exceeds ANSI A118.12 Specifications for Crack Isolation Membranes
- Low VOC
- Contributes to LEED® project points



Ultimate 6 Plus Mortar

A high performance, polymer modified, full contact (full coverage) mortar designed for the installation of ceramic, porcelain and natural stone tile.

- Ideal for Gauged Porcelain Tile Panels/Slabs, LHT and thin set applications
- Approved for use under and over uncoupling membranes
- Approved for extruded foam waterproof boards
- Approved for indoor glass tile applications with intermittent water exposure (shower walls, backsplash)
- Extended open time and pot life
- Grout and return to service in 6 hours
- Extended coverage—50 pound coverage in a 40 pound bag
- Smooth, creamy consistency
- Exceeds ANSI A118.4TE and A118.11 specifications



Color Consistency



Power Grout®

Power Grout® provides the ultimate in grout performance, combining many of the benefits of epoxy and urethane without the hard-to-use drawbacks and costs.

- Stain resistant
- Zero efflorescence
- Crack and shrink resistant
- Mold and mildew resistant
- Requires no sealing
- Fast setting—open to traffic in 4 hours
- 1/16" - 1/2" joint width
- Exceeds ANSI A118.7 specifications
- Zero VOC
- Contributes to LEED® project points



Crack Resistance

TECSpecialty.com