

Design-Inspired Installations Made Easy!

See Reverse for
More Information ▶

TEC® Design FX® Grout



Design FX® Grout is inspired by the latest design trends, available in crystal[†], silver and bronze. With its reflective effect, Design FX® Grout accentuates the beauty of glass, mosaic and metal tiles, and can bring a high-end aesthetic to ceramic, porcelain and natural stone tile. Its stain-proof*, color-consistent formula comes ready-to-use right from the pail, spreads smoothly and grout haze cleans easily off the face of the tile during installation.

Contact your local sales rep to request a demo. Have a question? Visit TECQuestions.com.

TECSpecialty.com



@InstallwithTEC



TECInstallationSystems



TEC Installation Systems



*Design FX® grout is stain-proof against most common household, residential stains when cleaned immediately. See product data sheet for detailed information.


[†]To enhance the appearance of the tile, this product is clear, and will absorb color from the surrounding material.



Design FX® Design-Inspired Stain-Proof* Grout



Ready-to-use, spreads easily

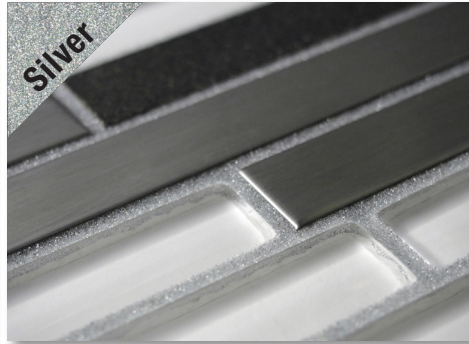

Grout haze cleans easily off the face of the tile



Stain-proof* with no sealing

Features and Benefits

- Ready-to-use, no mixing
- Stain-proof* with no sealing
- Easy clean-up
- Color consistent, no efflorescence
- Mold and mildew resistant
- Crack and shrink resistant
- Interior and exterior applications

Packaging

½ gallon container (1.89 L)

Available Colors

Crystal†, Silver, Bronze



Coverage

Figures shown in the chart are presented only as guidelines.

Approximate Coverage per 1/2 Gallon (1.89L)					
Tile Size	Joint Width				
	1/16" (1.6 mm)	1/8" (3 mm)	1/4" (6 mm)	3/8" (9 mm)	1/2" (12 mm)
1" x 1" x 1/8" 25 x 25 x 3 mm	51 s.f. 4.7 m ²	25.5 s.f. 2.4 m ²			
1" x 1" x 1/4" 25 x 25 x 6 mm	25.6 s.f. 2.4 m ²	12.8 s.f. 1.2 m ²			
4" x 4" x 1/8" 100 x 100 x 3 mm	205 s.f. 19.0 m ²	103 s.f. 9.6 m ²			
12" x 12" x 1/4" 300 x 300 x 6 mm	307 s.f. 28.6 m ²	153.5 s.f. 14.3 m ²	78.6 s.f. 7.3 m ²	51.3 s.f. 4.8 m ²	38.4 s.f. 3.5 m ²
16" x 16" x 5/16" 400 x 400 x 8 mm	329 s.f. 30.6 m ²	164.5 s.f. 15.3 m ²	82.2 s.f. 17.2 m ²	54.8 s.f. 5.1 m ²	41.1 s.f. 3.8 m ²
18" x 18" x 5/16" 450 x 450 x 8 mm	370 s.f. 34.4 m ²	185 s.f. 17.2 m ²	92.5 s.f. 8.6 m ²	61.5 s.f. 5.7 m ²	46.2 s.f. 4.3 m ²
12" x 24" x 3/8" 300 x 609 x 9 mm	274 s.f. 25.5 m ²	137 s.f. 12.7 m ²	68.5 s.f. 6.4 m ²	45.5 s.f. 4.2 m ²	34.2 s.f. 3.2 m ²
24" x 24" x 3/8" 609 x 609 x 9 mm	410 s.f. 38.1 m ²	205 s.f. 19.0 m ²	102.5 s.f. 9.5 m ²	68.5 s.f. 6.4 m ²	51.2 s.f. 4.8 m ²

Physical Properties

Description	
Light Foot Traffic [at 72°F (22°C)]	24 hours
Intermittent Water Exposure	3 days
Final Cure (full stain and water resistance)	7 days
Low VOC	10 g/L
Foot Traffic Rating (ASTM C627)	Residential to moderate commercial
Storage	Store indoors in cool, dry location. Do not store open containers. Freeze/thaw stable to -10°F (-23°C).
Shelf Life	Maximum 18 months from date of manufacture in properly stored, unopened package.

*Design FX® grout is stain-proof against most common household, residential stains when cleaned immediately. See product data sheet for detailed information.

† To enhance the appearance of the tile, this product is clear, and will absorb color from the surrounding material.

Visit tecspecialty.com to learn more

